




THERMO-L

880g/m² | 0.8mm thick | 8 HS SATIN | Fiberglass cloth | high density

355.0.THERMO-L

Thermo L is 880g/m² and 0.8mm thick. The weave type of this cloth is 8HS satin weave. Different from plain weave, satin weave has higher density, higher intensity with a loose structural weave. This thick fiberglass cloth is always used in applications including thermal Insulation, welding spark/splash protection, stress relieving, removable insulation exhaust blanket, fire blankets, weldingblanket and fire curtain, fabric expansion joint/duct.

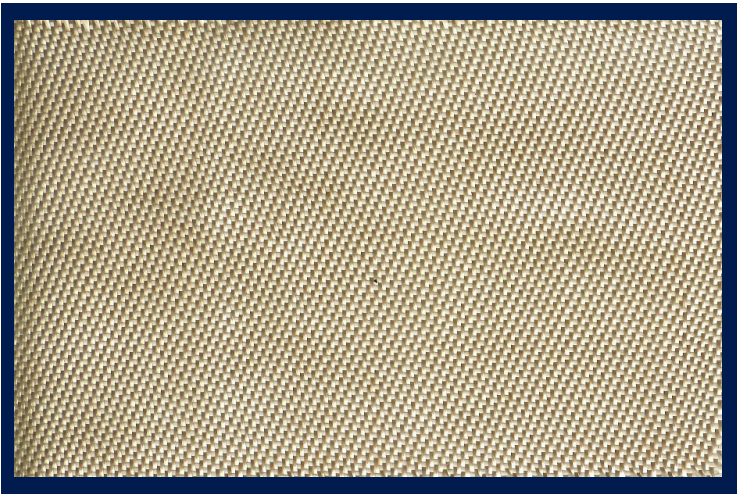

Weave		Double plain	
Yarn Tex	Wrap	EC9 33 4X2	CCH 150 4/2
	Weft	EC9 33 4X2	CCH 150 4/2
Width		101,6 cm	40 inch
		121,9 cm	48 inch
		152,4 cm	60 inch
Thickness		0,8 mm	0,31 inch
Weight		880 g/m ²	26 OZ/YD ²
Threadcount	Wrap	18 per cm	45 per inch
	Weft	13 per cm	33 per inch
Tensile strength min	Wrap	8000 N/5cm	888 lbs/inch
	Weft	8000 N/5cm	666 lbs/inch
L.O.I %		< 1.0 %	
Servicetemperature		550°C	



EXPERIENCE THE CONVENIENCE OF EVERYTHING UNDER ONE ROOF

At Lascentrum, you can find everything you need regarding products for welding and safety. Lascentrum has been established in 1988 and now imports a complete range of welding consumables, gouging electrodes, gas welding & cutting equipment, welding blankets, safety products and accessories.

CONTACT

Nieuwland Parc 1
2952 DA Alblasserdam,
The Netherlands

T: +31 (0)78 642 96 56
F: +31 (0)78 642 96 86

www.lascentrum.com
info@lascentrum.com

